


## 034E Wind Sensor

The 034E Wind Sensor combines wind speed and direction measurements in a single sensing unit. It installs in minutes and provides accurate, long-term, continuous monitoring in hostile environments.

The sensor uses a quick-connect sensor cable which may extend hundreds of feet without affecting measurement performance.

### Features:

- Compact design for minimum visual impact
- Long field life
- Durable aluminum and stainless steel construction
- Low starting threshold
- Very low power operation
- Easy maintenance and re-alignment
- Sealed magnetic reed switch for wind speed measurement
- Aluminum direction vane coupled to a precision potentiometer
- Digital or analog measurement ability

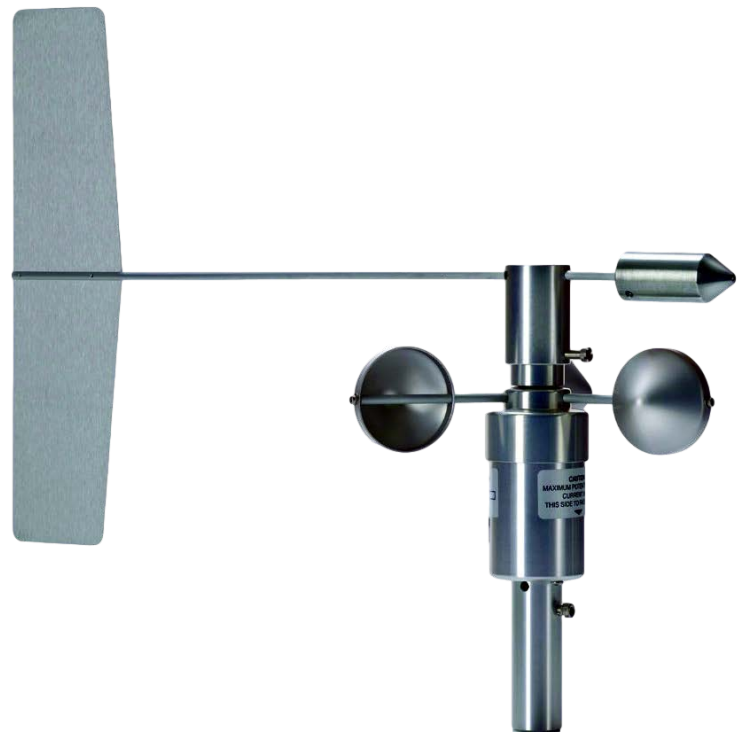

### Applications

- Ambient Monitoring
- Environmental Surveys
- Fence line Monitoring

## Wind Speed

Range:	0 - 167 mph (0 - 75 m/s)
Starting Threshold:	0.9 mph (0.4 m/s)
Accuracy < 22.7 mph:	.25 mph (0.1 m/s)
Accuracy > 22.7 mph:	±1.0% of true

## Wind Direction

Range:	Mechanical: 0° - 360°
Electrical:	0 - 356°
Starting Threshold:	0.9 mph (0.4 m/s)
Accuracy:	±3°
Damping Ratio:	.25 standard (.4 to .6 optional)
Resolution:	< 0.5°

## Temperature Range

Minimal icing conditions	-30°C to +70°C (-22°F to +158°F)
--------------------------	----------------------------------

## Output Signal

Wind Speed:	Pulsed contact closure
Wind Direction:	Potentiometer output (0 – 10 K ohms)

## Physical Characteristics

Sensor Weight:	1 lb 12.5 oz (0.81 kg)
Finish:	Clear anodized aluminum

## Cable & Mounting

P/N 3013	Cable Assembly; specify length in feet or meters
Mounting:	PN 2954 Mounting & Alignment Adapter

Mounting with the alignment adapter (P/N 2954) maintains alignment even if the sensor is removed for maintenance. The alignment adapter mounts the 034E to 1" diameter tubing or pipe. P/N 7156 is a horizontal sensor mounting arm. Contact factory for special mounting applications.

*Specifications are subject to change at any time.*